



ITT

ROBOT PUMPS

Vortex stainless steel pump

RW2110BB

60 c/s


The vortex stainless steel pumps are designed to pump a wide variety of solids contaminated liquids in many applications. Vortex pumps are used for sewage and other waste water applications. The pump can be used in aggressive applications pH = 1-13. Standard elastomers are in FPM (Viton).

Pump

solids passage : 2 "
 suction diameter : 2 "
 discharge diameter : 2 "
 impeller code : 95-80
 recommended minimum flow : 24 USGPM

Motor

rated horse power : 2.3 hp
 rated electrical power : 2.5 kW
 rated kVA : 2.6 kVA
 mains : 60 c/s
 speed : 3500 rpm
 rated efficiency : 69 %
 rated power factor (cos phi) : 0.91
 degree of protection : IP 68
 isolation class : F (311 °F)
 max. water temperature : 104 °F
 (higher temperatures on request)
 standard cable length : 33 ft
 max. submersion depth : 66ft

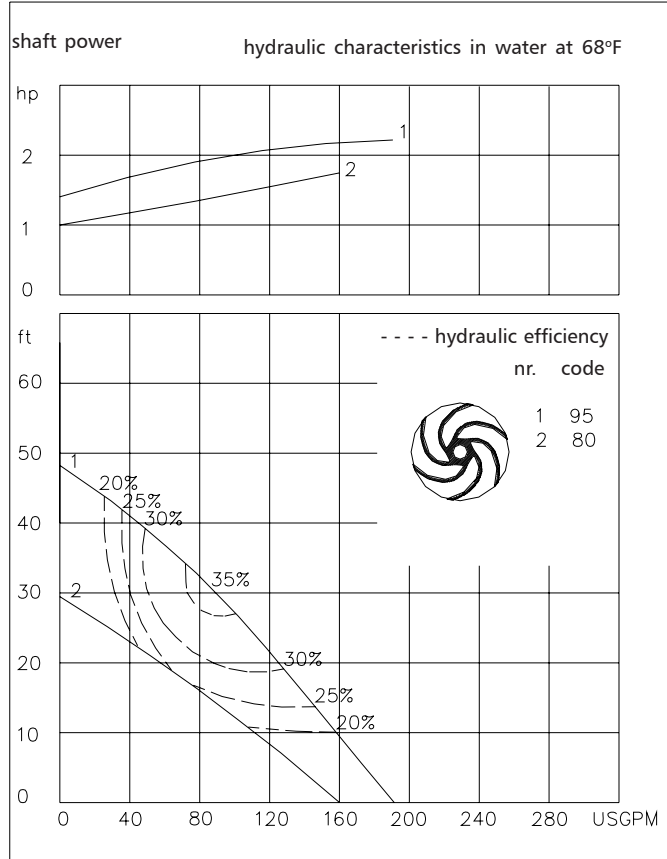

15.9 USGPM = 1 l/s 1 hp = 0.746 kW 1 ft = 0.3 m 1 lb = 0.45 kg

Materials

motor housing : 5 6
 seal housing : 5 6
 volute : 5 6
 impeller : 5 6
 shaft : 5
 bolts : 5

elastomers : 10
 electrical cable : 9
 seal lubrication : oil
 pump seal : silicon carbide-silicon carbide
 motor seal : carbon-ceramic

1	cast iron	ASTM A-48 Cl.35
2	sg cast iron	ASTM A445 Gr.60-46-18
3	stainless steel	AISI 431
4	stainless steel	AISI 304
5	stainless steel	AISI 316
6	stainless steel	AISI 329
7	wear resistant sg iron	HB500
8	nitrile	(NBR)
9	neoprene	(CR)
10	viton	(FPM)

www.ittwalphen.com

Engineered for life




ITT

ROBOT PUMPS

Installation options

RW2110BB

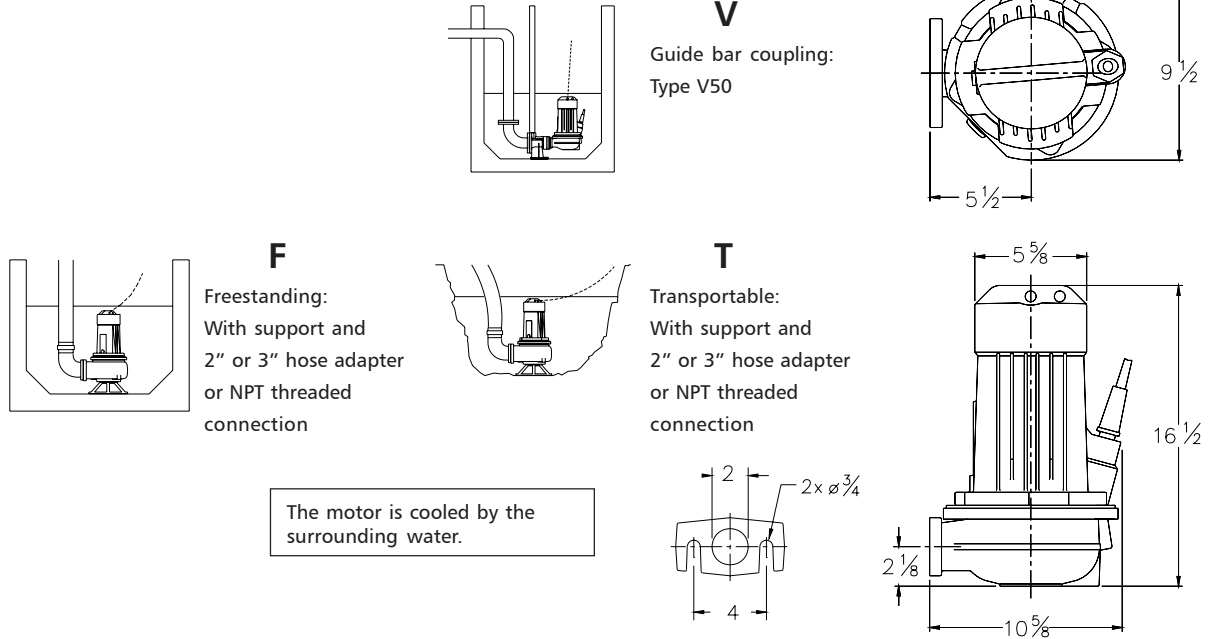

Versions

BR Basic stainless Steel

Standard with thermostiches
All parts in stainless steel 316

BD Basic Duplex Steel

Standard with thermostiches
All casted parts in stainless steel 329

Weight

79 lbs

79 lbs

Optional:

Flexible protective sheating for cable
(AISI 316)

Water detector in motor and oil housing

Motor connection details

voltage [V]*	rated current[A]	number of cables x number of cores x cross section [mm ²]			
				with waterdetector and/or thermostiches	
220	6.9			DOL-start	
380	4.0			1xAWG14/7	
440	3.5			1xAWG14/7	
460	3.3			1xAWG14/7	
575	2.6			1xAWG14/7	

starting current DOL-start

: 4.8 x rated current

* other voltages on request

We reserve the right to alter specifications without prior notice.