



ITT

ROBOT PUMPS




Dry installed vortex pump

BW2020

The dry installed vortex pumps are designed to pump a wide variety of solids contaminated liquids. They are used for sewage and other waste water applications. These pumps are designed for a stationary dry installation of pump and motor.

solids passage : 65 mm **50 Hz**
 discharge flange : NW 80
 suction flange : NW 80
 impeller diameter : 225-170 mm
 recommended min. flow : 3.5 l/s (13 m³/h)

hydraulic characteristics in clean cold water according to ISO 9906 grade 2

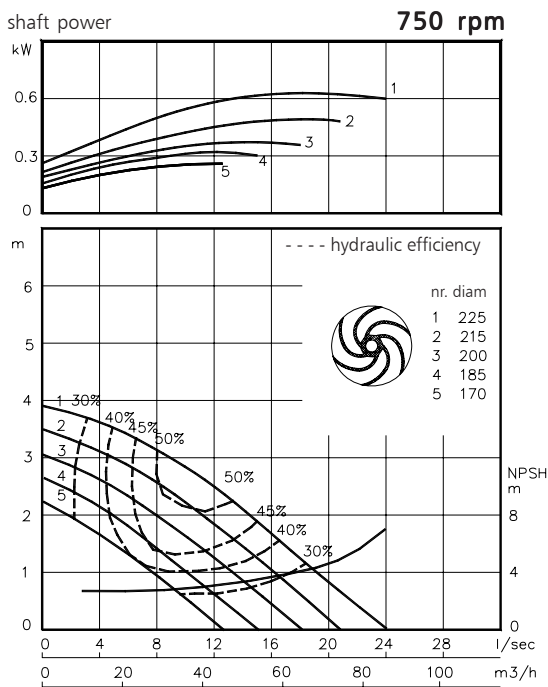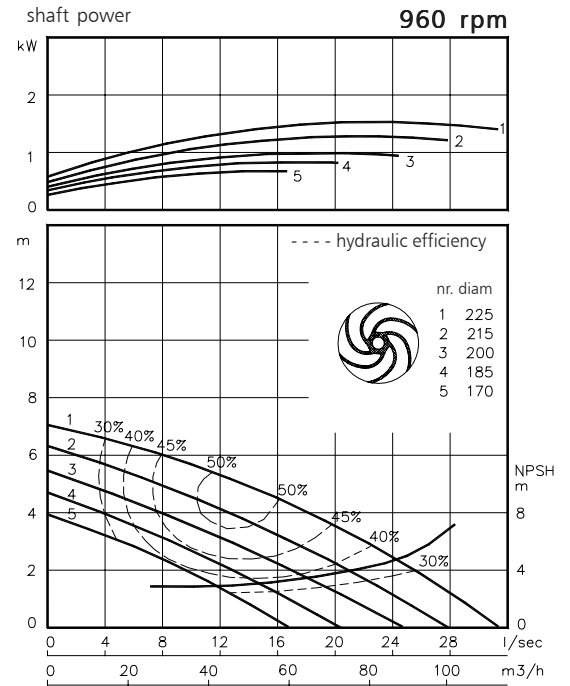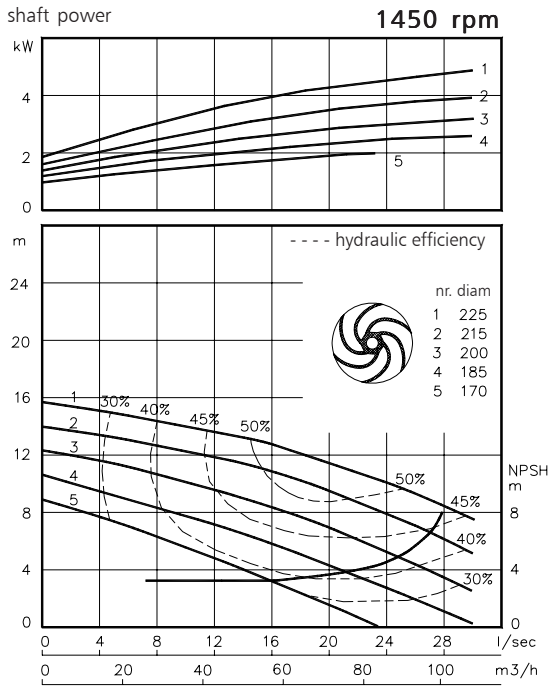

Available electric motors
Degree of protection IP55

Class	kW	[rpm]
IEC 100L	0.75	750
	1.5	960
	2.2	1450
IEC 112M	2.2	960
	4.0	1450
IEC 132S	3.0	960
	5.5	1450
IEC 132M	4.0	960
	5.5	960
	7.5	1450

www.robotpumps.com

Engineered for life

