



ITT

ROBOT PUMPS



Dry Installed Vortex Pump

BW2030

The dry installed vortex pumps are designed to pump a wide variety of solids contaminated liquids. They are used for sewage and other waste water applications. These pumps are designed for a stationary dry installation of pump and motor.

solids passage : 3" **60 c/s**
 discharge flange : 4"
 suction flange : 4"
 impeller code : 252-170
 recommended minium flow : 95 USGPM

hydraulic characteristics in water at 68°F

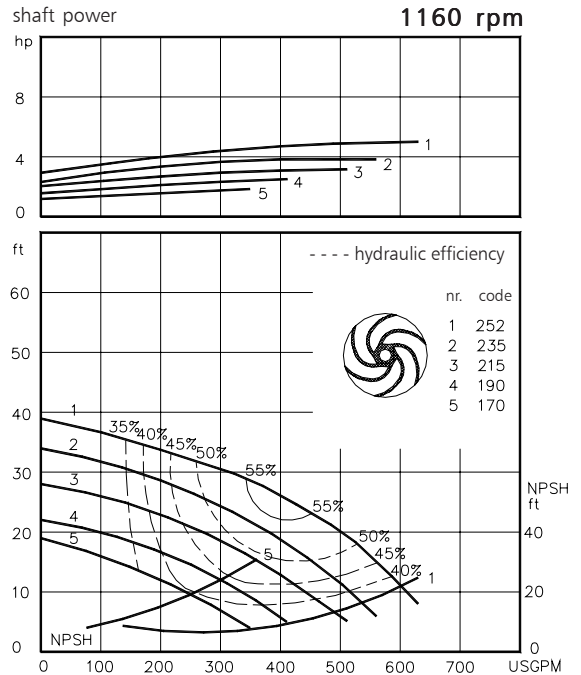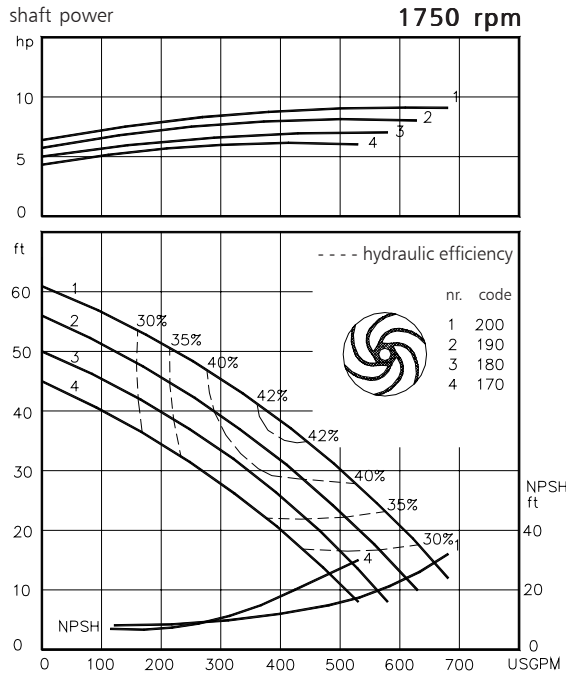

Available electric motors		
Degree of protection IP55		
NEMA	[hp]	[rpm]
184T	2.0	1160
213T	3.0	1160
215T	5.0	1160
184T	5.0	1750
213T	7.5	1750
215T	10	1750

www.ittwwwalphen.com

Engineered for life

