



ITT

ROBOT PUMPS

Vortex stainless steel pump

RW2122DC

60 c/s


The vortex stainless steel pumps are designed to pump a wide variety of solids contaminated liquids in many applications. Vortex pumps are used for sewage and other waste water applications. The pump can be used in aggressive applications pH = 1-13. Standard elastomers are in FPM (Viton).

Pump

solids passage : 2 1/2"
 suction diameter : 2 7/8"
 discharge diameter : 2 1/2"
 impeller code : 150-140
 recommended minimum flow : 32 USGPM

Motor

rated horse power : 2.3 hp
 rated electrical power : 2.4 kW
 rated kVA : 2.8 kVA
 mains : 60 c/s
 speed : 1750 rpm
 rated efficiency : 71 %
 rated power factor (cos phi) : 0.85
 degree of protection : IP 68
 isolation class : F (311 °F)
 max. water temperature : 104 °F
 (higher temperatures on request)
 standard cable length : 33 ft
 max. submersion depth : 66 ft

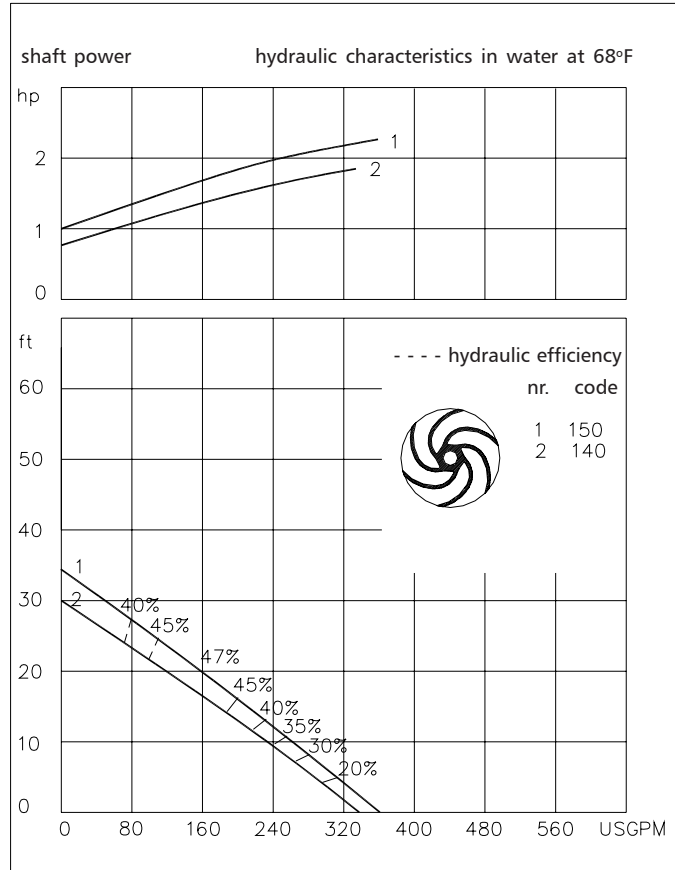

15.9 USGPM = 1 l/s 1 hp = 0.746 kW 1 ft = 0.3 m 1 lb = 0.45 kg

Materials

motor housing : 5 6
 seal housing : 5 6
 volute : 5 6
 impeller : 5 6
 shaft : 5
 bolts : 5

elastomers : 10
 electrical cable : 9
 seal lubrication : oil
 pump seal : silicon carbide-silicon carbide
 motor seal : carbon-ceramic

1	cast iron	ASTM A-48 Cl.35
2	sg cast iron	ASTM A445 Gr.60-46-18
3	stainless steel	AISI 431
4	stainless steel	AISI 304
5	stainless steel	AISI 316
6	stainless steel	AISI 329
7	wear resistant sg iron	HB500
8	nitrile	(NBR)
9	neoprene	(CR)
10	viton	(FPM)


www.ittwwwalphen.com

Engineered for life



Installation options

RW2122DC

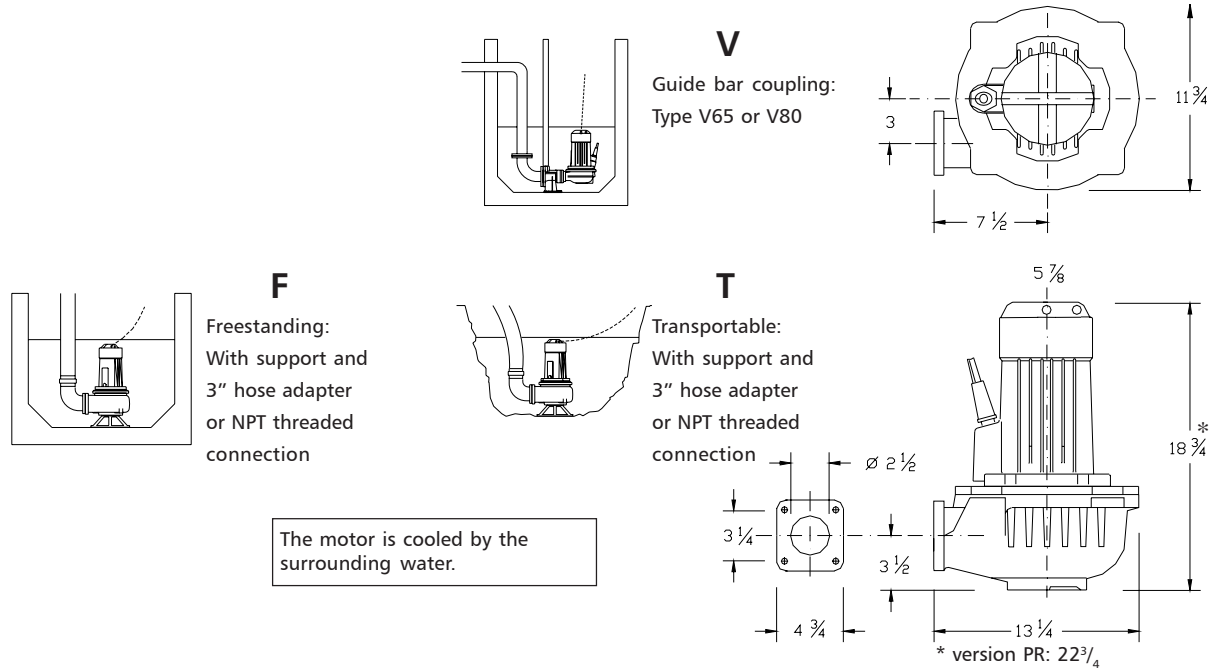

Versions

Weight

BR Basic Stainless Steel

136 lbs

Standard with thermostiches
All parts in stainless steel 316

BD Basic Duplex Steel

136 lbs

Standard with thermostiches
All casted parts in stainless steel 329

PR FM approved version

165 lbs

Certified according to:
Class I, Division I, Groups C&D T4
Standard with thermostiches
All parts in stainless steel 316

Optional:

Flexible protective sheathing for cable
(AISI 316)

Water detector in motor and oil housing
(for flame proof version only in oil housing with
external cable)

Motor connection details

voltage [V]*	rated current[A]	electrical cable size					
		with waterdetector and/or thermostiches			FM approved version		
220	7.4			DOL-start		DOL-start	
380	4.3			1xAWG14/7		1xAWG14/7	
440	3.6			1xAWG14/7		1xAWG14/7	
460	3.5			1xAWG14/7		1xAWG14/7	
575	2.8			1xAWG14/7		1xAWG14/7	

starting current DOL-start

: 4.8 x rated current

* other voltages on request

We reserve the right to alter specifications without prior notice.