



ITT

ROBOT PUMPS

Dry installed stainless steel vortex pump



BW4021

The dry installed stainless steel vortex pumps are designed to pump a wide variety of solids contaminated liquids. They are used for sewage and other waste water applications. The pump can be used in aggressive applications pH = 1-13. Standard elastomers are in FPM (Viton).

solids passage : 65 mm
 discharge flange : NW 80
 suction flange : NW 80
 impeller diameter : 178-140 mm
 recommended min. flow : 3.5 l/s (13 m³/h)

50 Hz

hydraulic characteristics in clean cold water according to ISO 9906 grade 2

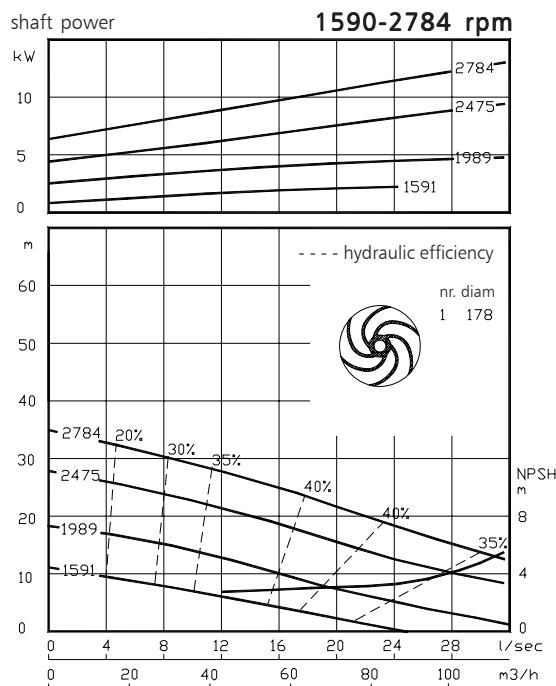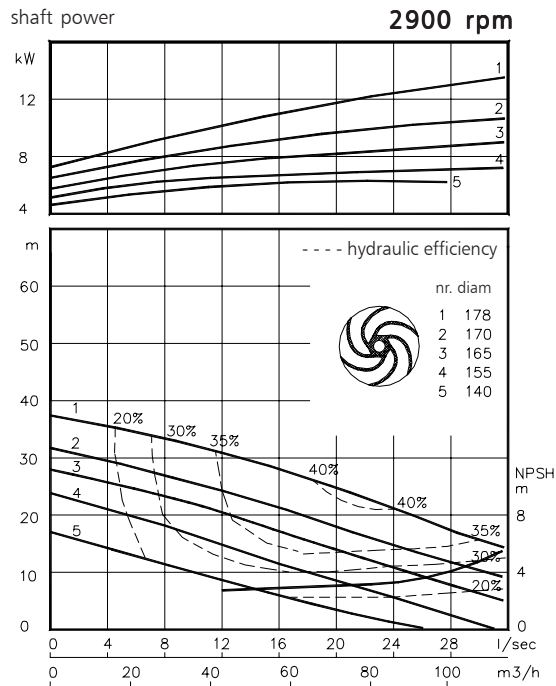

Available electric motors Degree of protection IP55		
Class	kW	[rpm]
IEC 132S	5.5	2900
	7.5	2900
IEC 160M	11.0	2900
	15.0	2900

www.robotpumps.com

Engineered for life

