



# ITT

## ROBOT PUMPS



### Dry Installed Vortex Pump

### BW6032

The dry installed vortex pumps are designed to pump a wide variety of solids contaminated liquids. They are used for sewage and other waste water applications. These pumps are designed for a stationary dry installation of pump and motor.

solids passage : 3" **60 c/s**  
 discharge flange : 4"  
 suction flange : 4"  
 impeller code : 230-160  
 recommended minium flow : 95 USGPM

hydraulic characteristics in water at 68°F

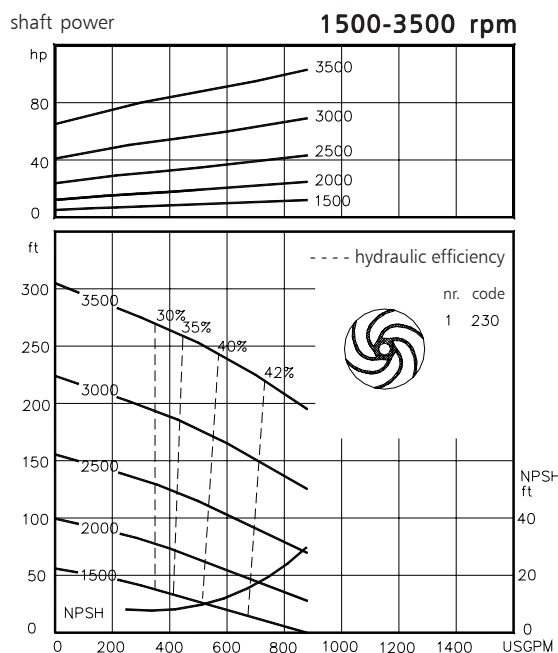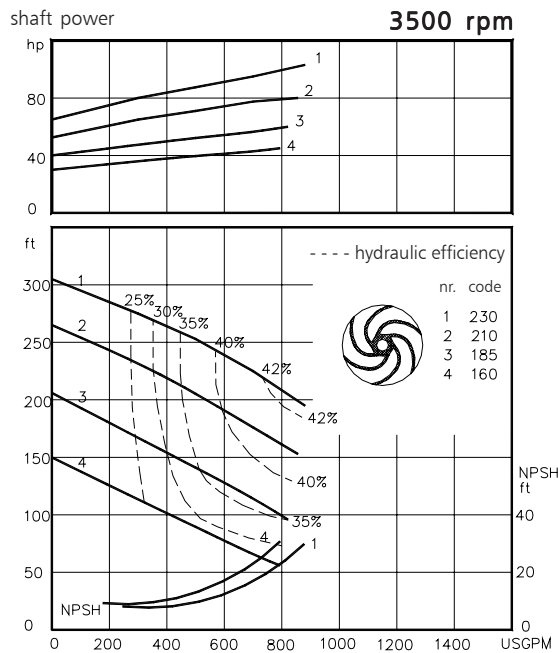

Available electric motors		
Degree of protection IP55		
NEMA	[hp]	[rpm]
215T	15	3500
254T	20	3500
256T	25	3500
284TS	30	3500
286TS	40	3500
324TS	50	3500
326TS	60	3500
364TS	75	3500
365TS	100	3500

[www.ittwwwalphen.com](http://www.ittwwwalphen.com)

*Engineered for life*

