



ITT

ROBOT PUMPS




Dry Installed Vortex Pump

BW5000

The dry installed vortex pumps are designed to pump a wide variety of solids contaminated liquids. They are used for sewage and other waste water applications. These pumps are designed for a stationary dry installation of pump and motor.

solids passage : 5" **60 c/s**
 discharge flange : 6"
 suction flange : 6"
 impeller code : 253-202
 recommended minium flow : 207 USGPM

hydraulic characteristics in water at 68°F

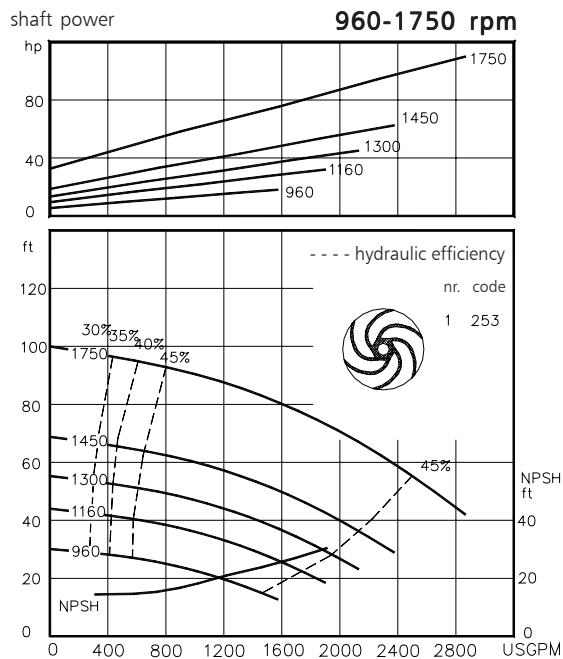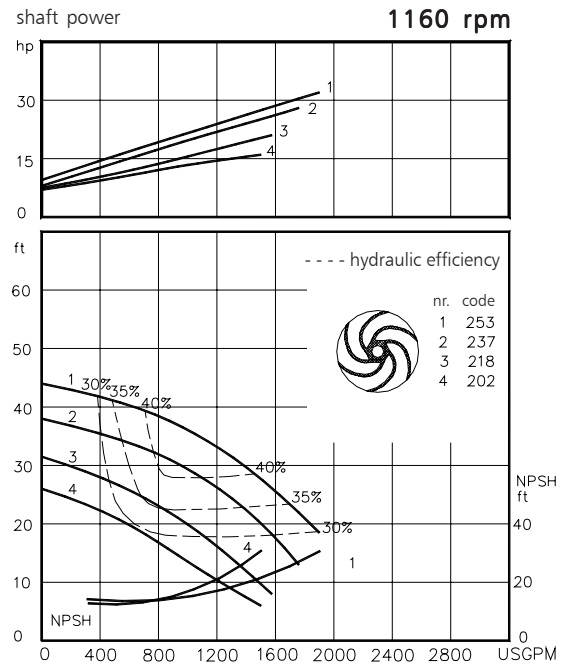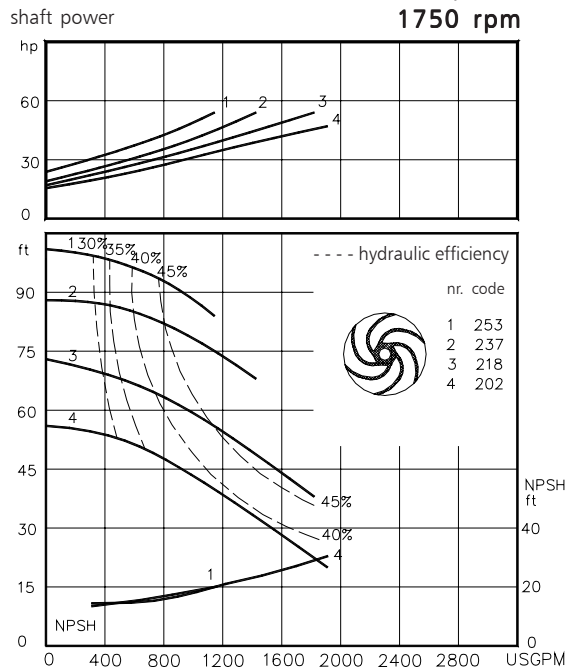

Available electric motors Degree of protection IP55		
NEMA	[hp]	[rpm]
256T	10	1160
284T	15	1160
286T	20	1160
324T	25	1160
326T	30	1160
256T	20	1750
284T	25	1750
286T	30	1750
324T	40	1750
326T	50	1750
364T	60	1750

www.itwwwalphen.com

Engineered for life

