



ITT

ROBOT PUMPS

BT - Turbotex Pump



BT2040

BT pumps are designed to pump sewage and other kinds of waste water in many different applications. These pumps are equally suitable for clean water or lightly contaminated liquids. They are designed for a stationary dry installation of pump and motor.

solids passage : 100 mm
 discharge flange : NW 100
 suction flange : NW 125
 impeller diameter : 226-165 mm
 recommended min. flow : 6 l/s (21 m³/h)

50 Hz

hydraulic characteristics in clean cold water according to ISO 9906 grade 2

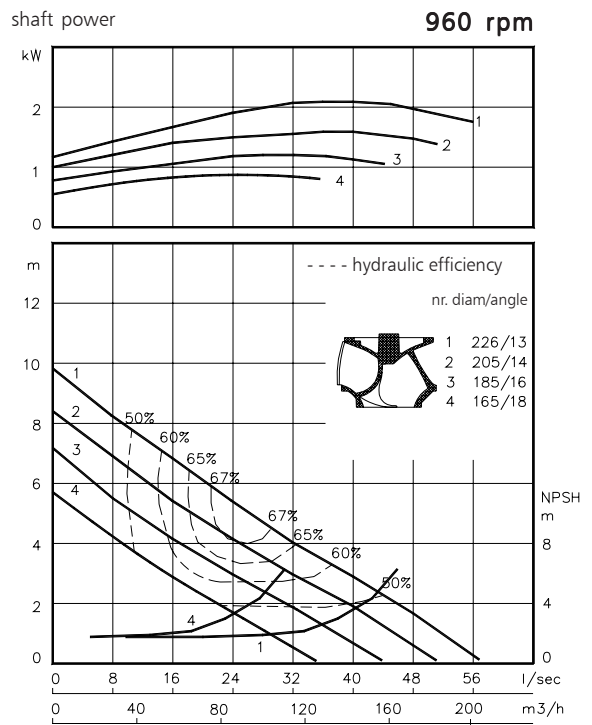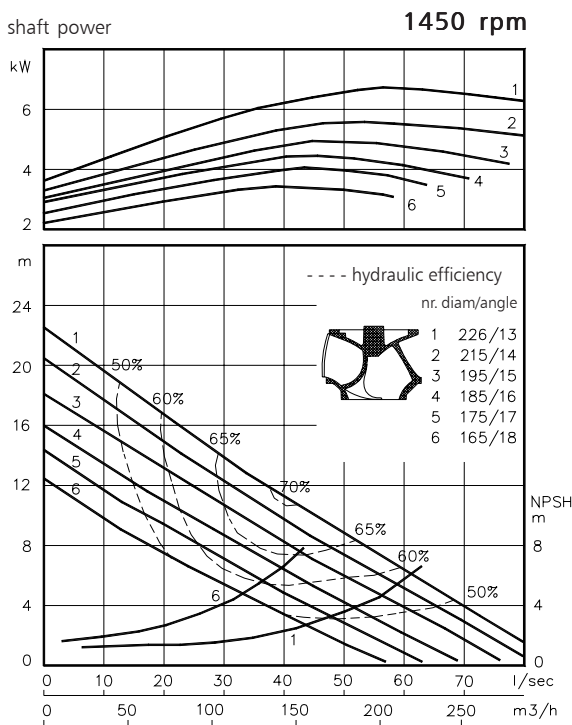

Available electric motors		
Degree of protection IP55		
Class	kW	[rpm]
IEC 100L	0.75	750
	1.5	960
	2.2	1450
	3.0	1450
IEC 112M	2.2	960
	4.0	1450
IEC 132S	3.0	960
	5.5	1450
IEC 132M	4.0	960
	5.5	960
	7.5	1450

www.itwwwalphen.com

Engineered for life

