




Technical Information

Installation dimensions BW20-HM

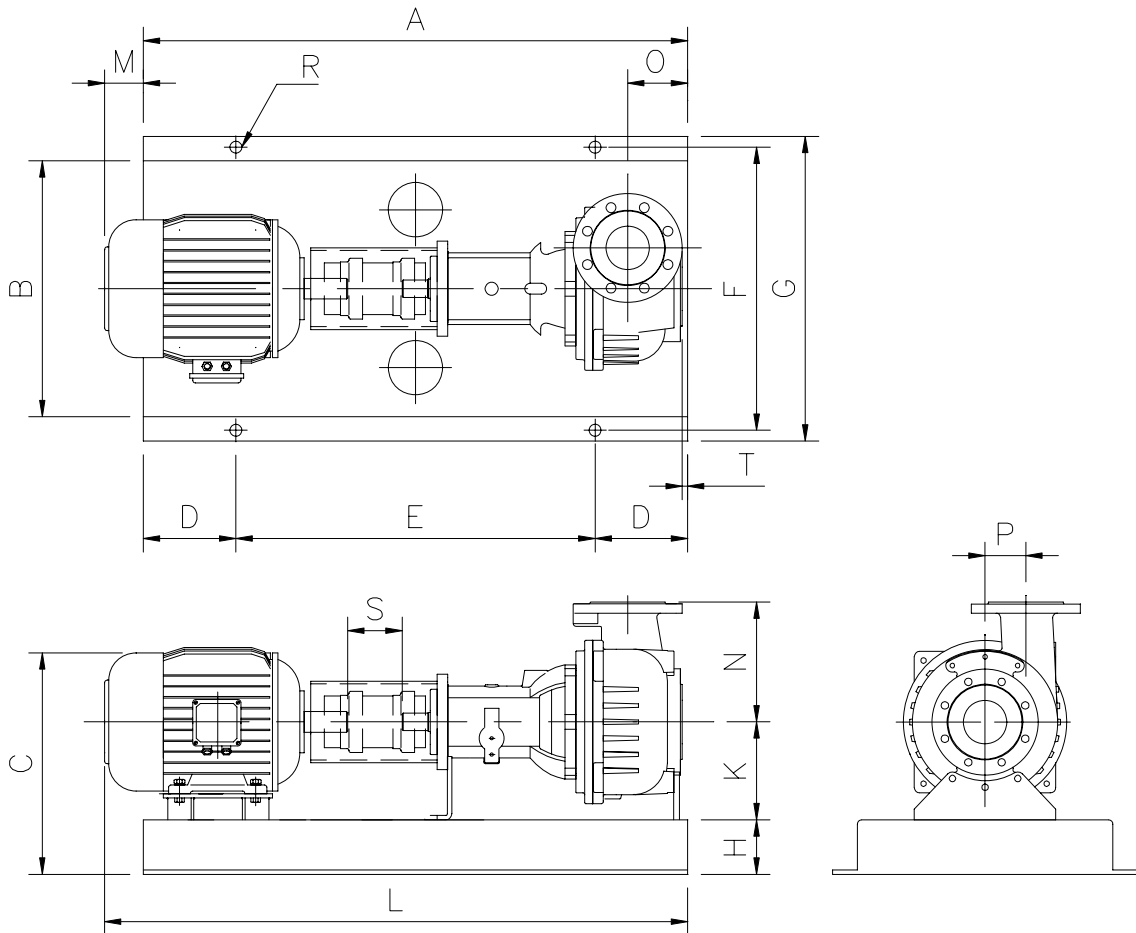

BW2020-HM																	
Motortype IEC	A	B	C	D	E	F	G	H	K	L	M	N	O	P	R	S	T
100 L	39 3/8	18 1/2	14 13/16	6 11/16	26	20 1/2	22 1/16	3 15/16	7 1/16	40 9/16	1 3/16	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
112 M	39 3/8	18 1/2	15 5/16	6 11/16	26	20 1/2	22 1/16	3 15/16	7 1/16	41 5/16	1 15/16	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
132 S	49 3/16	22 1/16	16 1/8	6 11/16	26	24 7/16	26 3/8	3 15/16	7 1/16	43 11/16	4 5/16	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
132 M	49 3/16	22 1/16	16 1/2	8 1/16	33 1/8	24 7/16	26 3/8	4 5/16	7 1/16	45 1/4	-	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
BW2021-HM																	
112 M	39 3/8	18 1/2	15 5/16	6 11/16	26	20 1/2	22 1/16	3 15/16	7 1/16	41 5/16	1 15/16	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
132 S	49 3/16	22 1/16	16 1/8	6 11/16	26	24 1/2	26 6/16	3 15/16	7 1/16	43 11/16	4 5/16	8 11/16	4 7/8	2 15/16	7/8	5 1/2	1
BW2030-HM																	
100 L	49 3/16	22 1/16	17	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	43 1/8	-	10 1/16	6	5 5/16	7/8	5 1/2	1
112 M	49 3/16	22 1/16	17 1/2	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	43 7/8	-	10 1/16	6	5 5/16	7/8	5 1/2	1
132 S	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	45 7/8	-	10 1/16	6	5 5/16	7/8	5 1/2	1
132 M	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	47 13/16	-	10 1/16	6	5 5/16	7/8	5 1/2	1
BW2040-HM																	
100 L	49 3/16	22 1/16	17	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	43 2/16	-	10 1/16	6	5 5/16	7/8	5 1/2	1
112 M	49 3/16	22 1/16	17 1/2	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	43 7/8	-	10 1/16	6	5 5/16	7/8	5 1/2	1
132 S	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	45 7/8	-	10 1/16	6	5 5/16	7/8	5 1/2	1
132 M	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	47 13/16	-	10 1/16	6	5 5/16	7/8	5 1/2	1
BW2041-HM																	
100 L	49 3/16	22 1/16	17	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	44 2/16	-	12 1/16	6 4/8	4 3/4	7/8	5 1/2	1
112 M	49 3/16	22 1/16	17 1/2	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	44 14/16	-	12 1/16	6 4/8	4 3/4	7/8	5 1/2	1
132 S	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	47 1/16	-	12 1/16	6 4/8	4 3/4	7/8	5 1/2	1
132 M	49 3/16	22 1/16	18 1/4	8 1/16	33 1/16	24 7/16	26 3/8	4 5/16	8 7/8	48 13/16	-	12 1/16	6 4/8	4 3/4	7/8	5 1/2	1